

FEATURES

- ▶ Threaded exhaust connection
- ▶ Reliable performance
- ▶ Suitable with triple certification UL, CSA, VDE
- ▶ High flow

TECHNICAL SPECIFICATION

- ▶ **Body material:** Brass UNI EN 12165 CW617N
- ▶ **Armature tube:** Stainless Steel AISI 300 series
- ▶ **Plungers:** Stainless Steel AISI 400 series
- ▶ **Spring:** Stainless Steel AISI 300 series
- ▶ **Media:** mineral oils, gasoline, diesel, air, inert gases, water, steam, fuel oils, hot water,
- ▶ **Ambient temperature:** See coils catalogue page for its compatibility
- ▶ **Fluid temperature:** -10°C +140°C with FKM seals
-40°C +180°C with RUBY seals
- ▶ **Design pressure PS:** 40 bar
- ▶ **Protection class:** IP 65 (complete with electric plug)
- ▶ **Electrical conformity:** IEC 335
- ▶ **Switching time:** 20-40 msec

AVAILABLE ON REQUEST

- ▶ Also available with low lead brass for food grade
- ▶ The use of rigid sealings usually implies a slight leakage, limited within 2scc/min at the pressure of 1 bar
- ▶ Manual override (i.e. 31A2AV15-M)
- ▶ Latching coil (See coil section)

31A	1	A	V	15	
Model valve	1 SUBPLATE MOUNTING	A= N.C.	R= RUBY	10	Orifice 10 ⁻¹ mm
				15	
			V= FKM	20	
				25	

B	D	A	08	024	A	S
B= 30mm Ø 13	D EN 175301-803	A= Class F	08= 8W	024= 24V	A= AC	S= Without Approval
		V= Class H		110= 110V-120V	C= DC	Y= UL, CSA, VDE
				223= 220V-230V	D= AC	

PIPE	Ø (mm)	Kv (l/min)	MAX VISCOSITY cSt (°E)	PRESSURE min	PRESSURE MAX MOPD (bar)						GAS CODE	NPT CODE	DRAWING REFERENCE
					COIL TYPE								
					AC			DC					
					B	U	G	B	U	G			


Normally Closed (*) 3rd way exhaust= Ø 2,5 mm

SUBPLATE MOUNTING	1,5(*)	1,4	-	0	15			15			31A1A5R15-AG		1
	1,5(*)	1,4	-	0	15			15			21A1A5R15-AVG		1
	1(*)	0,45	-	0	20			20			31A1AR10		1
	1,5(*)	1,4	-	0	15			15			31A1AR15		1
	1,5(*)	1,4	-	0	15			15			31A1AR15-ORV		1
	1,5(*)	1,4	-	0	15			15			31A1AR15-VORV		1
	2(*)	2	-	0	10			10			31A1AR20		1
	2,5(*)	3,2	-	0	6			6			31A1AR25		1
	1(*)	0,45	12(2)	0	20			20			31A1AV10		1
	1,5(*)	1,4	12(2)	0	15			15			31A1AV15		1
	2(*)	2	37(5)	0	10			10			31A1AV20		1
	2,5(*)	3,2	53(7)	0	6			6			31A1AV25		1

Normally Open

SUBPLATE MOUNTING	1,5(*)	1,4	-	0	15			-			31A1FV15-Z		1
	2,5(*)	1,4	-	0	15			-			31A1FV20-Z		1

Suffix description: 31A1A5R15-AG	
-AG	Version with dempness-proof kit
-AVG	Version with dempness-proof kit
-ORV	Sealing system with FKM
-VORV	Armature tube sealing with FKM
-Z	Sub base FKM O-Ring

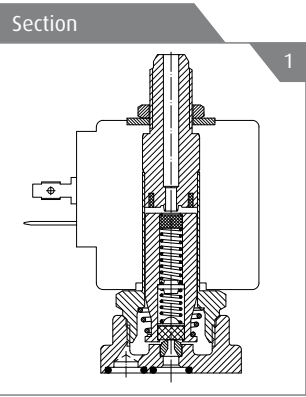


REPAIR KIT
Normally Closed
KT130AR30-B
KT130AR30-A
KT130AR30-AV

Normally Open
KT130FV30-AZ

RELATED ITEMS

- ▶ P990305: Electrical plug EN 175301-803 Pg9
- ▶ P990306: Electrical plug EN 175301-803 Pg11
- ▶ P992126: Electrical plug EN 175301-803 Pg9 (with OR screw)
- ▶ P992127: Electrical plug EN 175301-803 Pg11 (with OR screw)
- ▶ P992128: Electrical plug EN 175301-803 cable 2 wires, 53cm
- ▶ R452714: Antihumidity kit (up to IP67 protection together with plugs P992126, P992127; P992128 & H coils class)
- ▶ P992087: Timer for automatic switch

Drawing Reference

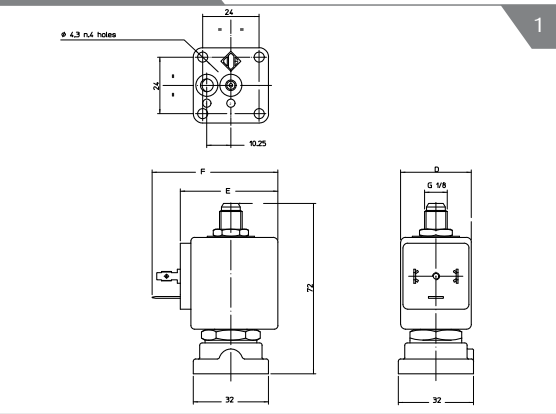

Dimensionale Table

Figure	Coil Type	D mm	E mm	F mm
1	B	30	42	54

